


CUSTOMER DRAWING


REV.	DESCRIPTION	APPROVED BY	DATE	ECN NDL.
A	RELEASE	Fido Veng	22/12/08*	
B				
C				

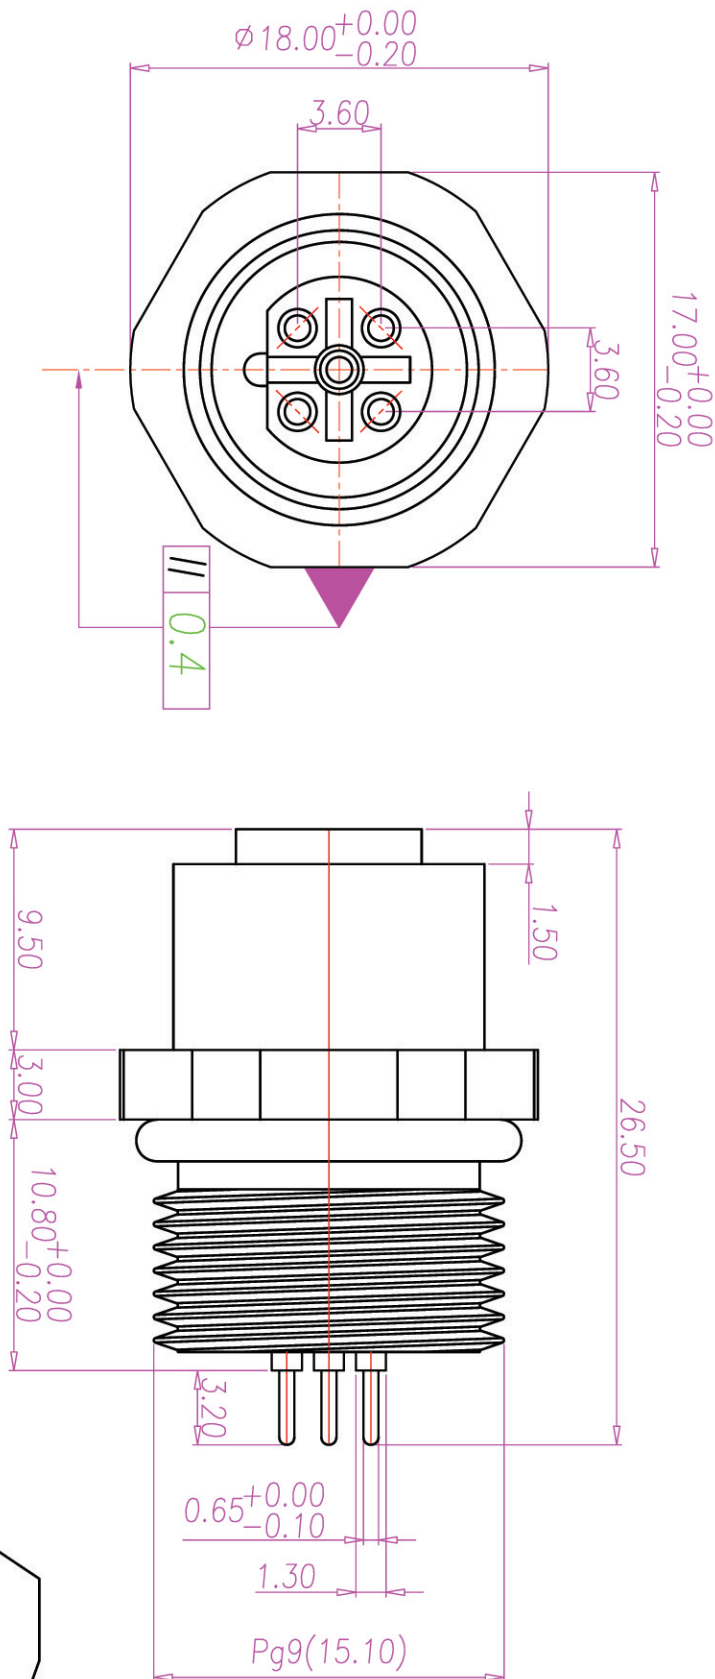

- MATERIAL :
 - HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - CONTACT : BRASS
 - SHELL : BRASS
 - O-RING :NBR; COLOR : BLACK
- FINISH :
 - CONTACT A : 30 MICRO INCHES MIN. GOLD PLATED
UNDER PLATE : NICKEL
 - SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL

- ELECTRICAL SPECIFICATION :
 - Rated current : 2A
 - Voltage :24V
 - Water proof: IPX7
 - Environmental :
 - Operation Temperature : -20c~-85c

RECOMMENDED P.C.B. LAYOUT

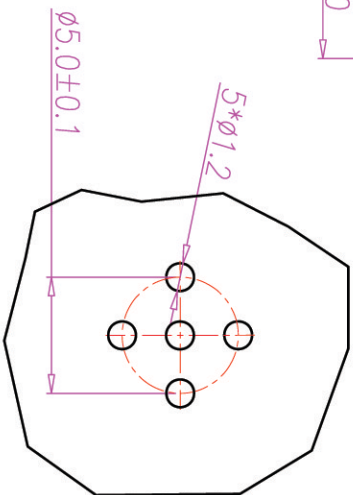

DRAWN	APP'D	UNIT	MM	TOLERANCE	SCALE	1:1	ANGLE	TITLE	PART NO.	DWG NO.	QC1567	SHEET	VERSION
CHK'D				x xx xxx xxxx	±0.20 ±0.10 ±0.05 ±0.03		ANGULA 31°	Conn, M12 5 pole,Female,B-coded, Internal Thread	WP-05F2-14			A	A