
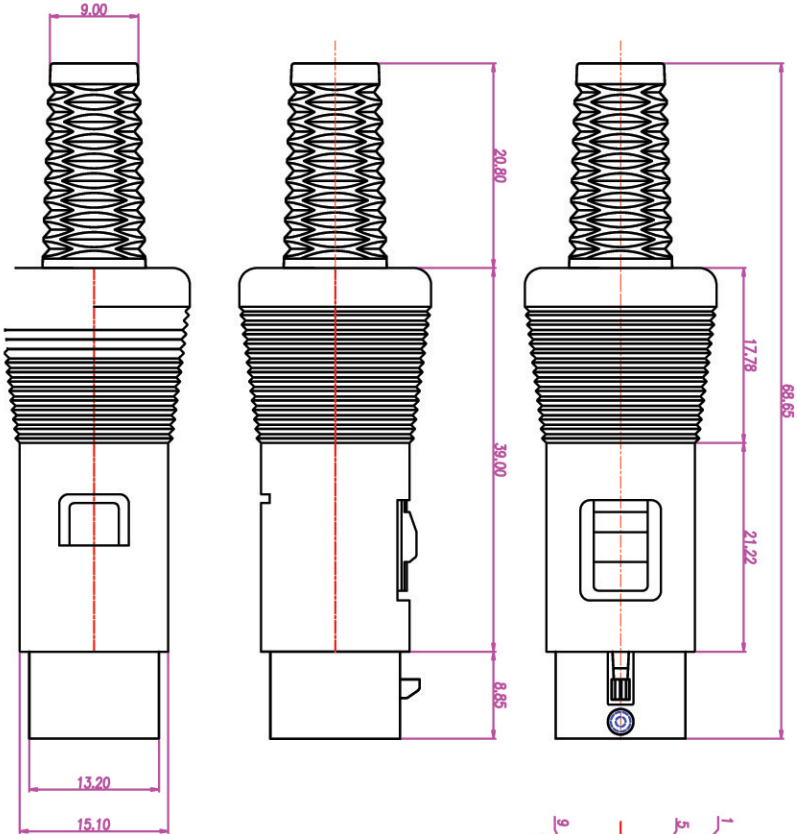


# QC DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE & CHANGE MATERIAL	Fido Veng	22/12/08*	
B				
C				



**備註/NOTE:**

- 1.安規/SAFETY:**  
 1-1.規格/RATING: 100V AC MAX or 12V DC 2A MAX  
 1-2.絕緣組件/INSULATION RESISTANCE: 50M $\Omega$ /MIN at 250V DC  
 1-3.絕緣耐壓/WITHSTANDING: 250V AC at 1 MINUTE
- 2.材質/MATERIAL:**  
 2-1.外蓋/PLASTIC COVER:PC  
 2-2.銅管/SHELL:黃銅/BRASS  
 2-3.膠芯/HOUSING: PBT 15%  
 2-4.彈片/SPRING: 黃銅/BRASS  
 2-5.針/PIN: 磷銅/PHOSPHOR BRONZE  
 2-6. SR: PVC
- 3.鍍鍍/PLATING:**  
 3-1.銅管/SHELL:鍍/NICKEL  
 3-2.彈片/SPRING:鍍/NICKEL  
 3-3.針/PIN:鍍/TIN

DRAWN	APP'D	UNIT	mm	TOLERANCE		SHEET
				x	±0.20	
CHK'D	SCALE	1:1	ANGULA	x	±0.10	A
				xx	±0.05	
				xxx	±0.03	
				ANGULA	±1°	
TITLE		DIN PLUG 13P 規格		PART NO.		DI-13M2-01
DWG NO.		QC0113		DATE		22/12/08*