# CUSTOMER DRAWING

| REV. | DESCRIPTION | APPROVED BY | DATE | ECN NO. |
|---|---|---|---|---|
| A | RELEASE | Fido Weng | 20/04/09' | |
| B | CHANGE DIM. | Fido Weng | 15/05/09' | |
| C | | | | |

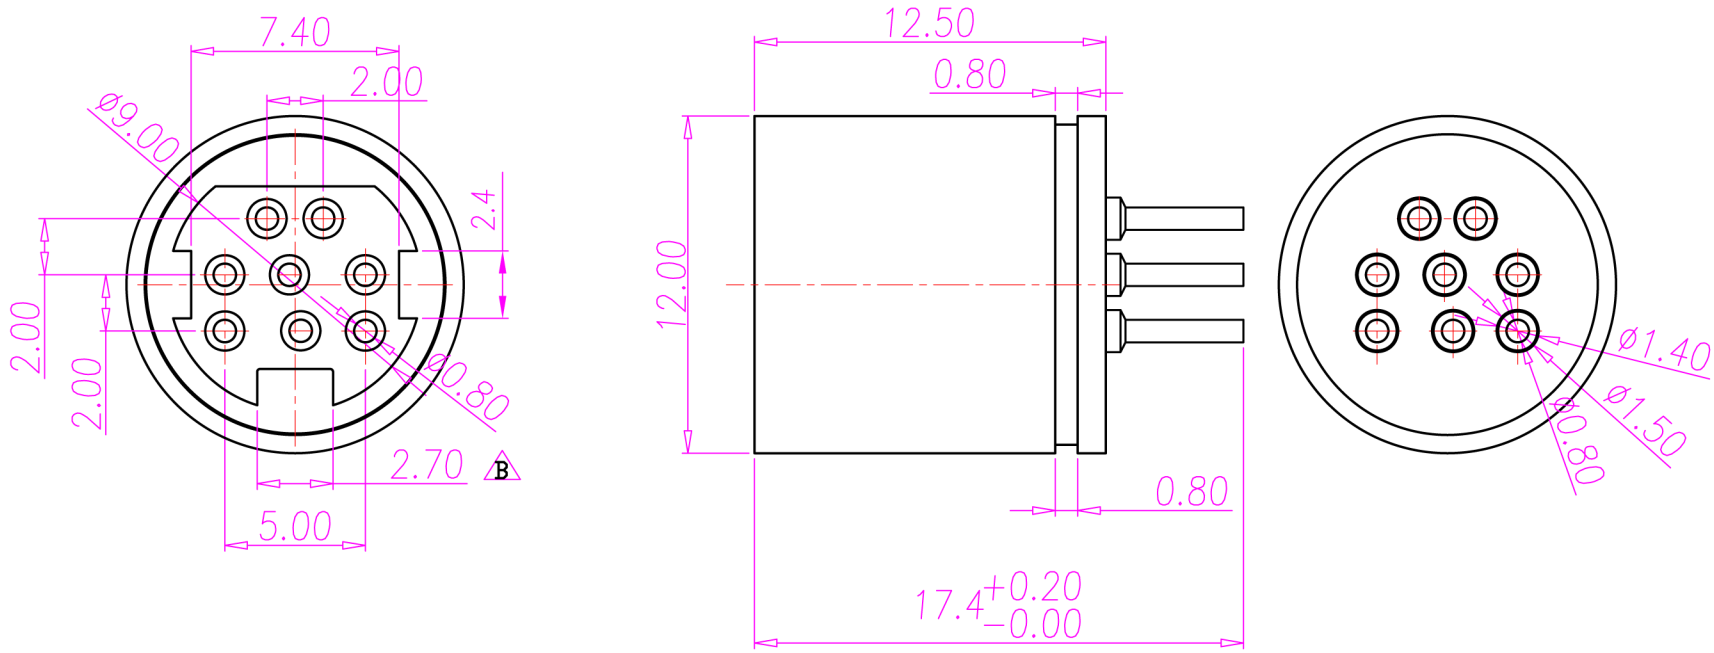


1. MATERIAL :
   1−1. HOUSING : PBT UL94V−0 ; COLOR : BLACK
   1−2. CONTACT : PHOSPHOR BRONZE
   1−3. SHELL : BRASS
2. FINISH :
   2−1. CONTACT : GOLD FLASH PLATED
   UNDER PLATE : NICKEL
   2−2. SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL
3. ELECTRICAL SPECIFICATION :
   3−1. Rated current : DC 3A MAX
   3−2. Rated Voltage : DC 12V MAX
4. Environmental :
   4−1. Operation Temperature : −40 ℃~85℃

| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| DRAWN | Emily Suen | APP'D | | UNIT | mm | TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1° | TITLE | POWER DIN 8PIN(F) PLUG | | SHEET 1/1 |
| CHK'D | | | | SCALE | 1:1 | | PART NO. | PD-08F2-01 | DWG NO. QC2056 | VERSION B |