


# JR-201SD8AR

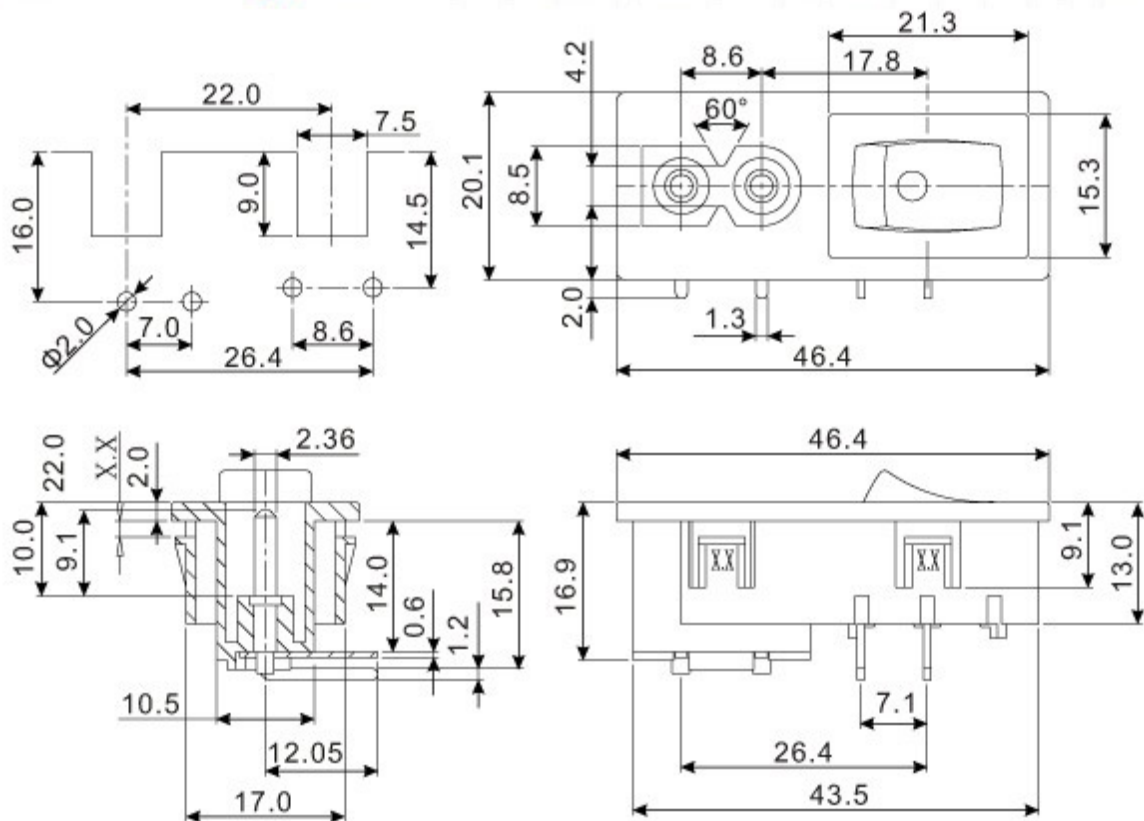

## Specifications:

1. Rating : 2.5A 250VAC
2. Insulation Resistance : DC 500V 100M $\Omega$  (min.)
3. Dielectric Strength : 2000 VAC/1 Minute
4. Housing Material : P.B.T. UL 94V-0 (Screw Type)  
Nylon # 66 UL 94V-2 or 94V-0 (Snap Type)

5. Safety Approval :         

