# RoHS Compliance

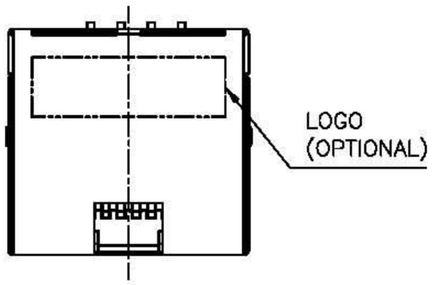


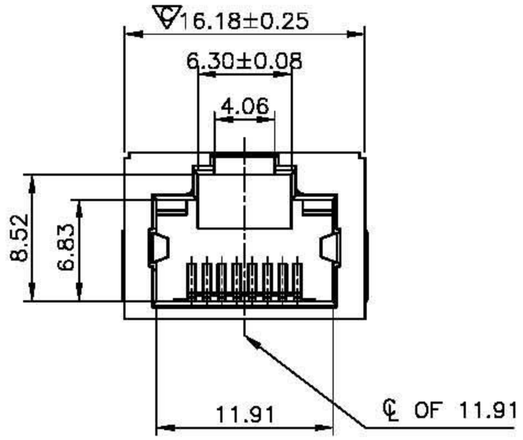


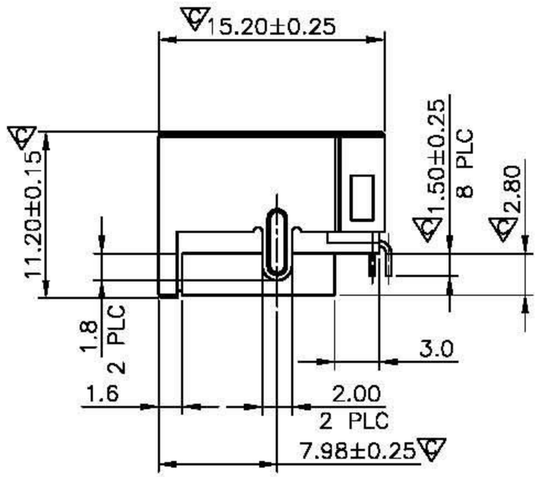


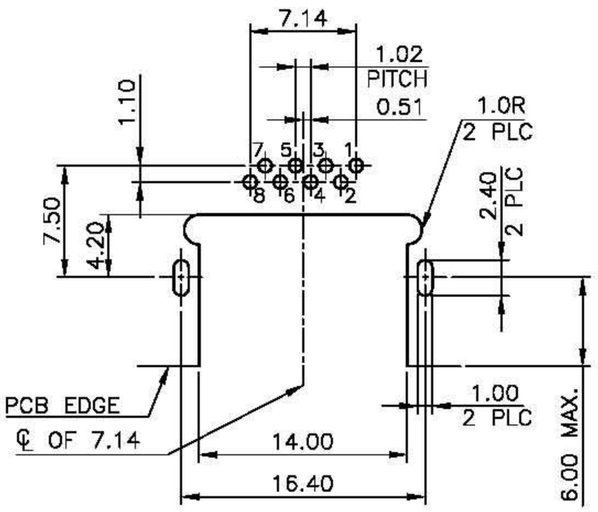


RECOMMENDED PCB LAYOUT

RECOMMENDED PCB THICKNESS: 1.2mm
TOLERANCE: ±0.05 (TOP VIEW)

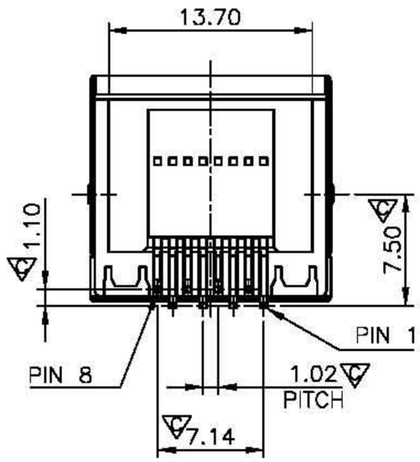


| LTR | DESCRIPTION | DATE | APVD |
|---|---|---|---|
| | | | |
| | | | |
| | | | |

REVISIONS

THIS DRAWING IS A CONTROLLED DOCUMENT.
DO NOT SCALE DRAWING.

| | |
|---|---|
| DIMENSIONS: MM | TOLERANCES UNLESS OTHERWISE SPECIFIED: |
| THIRD ANGLE PROJECTION | 0 PLC ± –<br>1 PLC ±0.25<br>2 PLC ±0.13<br>3 PLC ±0.05<br>ANGLES ± – |
| MATERIAL SEE NOTES | FINISH SEE NOTES |
| DWN A.HUANG | DATE JAN–17–2010 |
| CHK M.CHANG | JAN–17–2010 |
| APVD W.J.YANG | JAN–18–2010 |

E-YUNG ENTERPRISE CO., LTD.

TITLE: MODULAR JACK CONNECTOR, RJ45, SIDE ENTRY, WITH SHELL, DIP TYPE

| SIZE | CAUGE CODE | DRAWING NO | |
|---|---|---|---|
| A3 | – | 982212 | |
| WEIGHT | – GRAMS Ref. | REV 1 | SHEET 1 |