

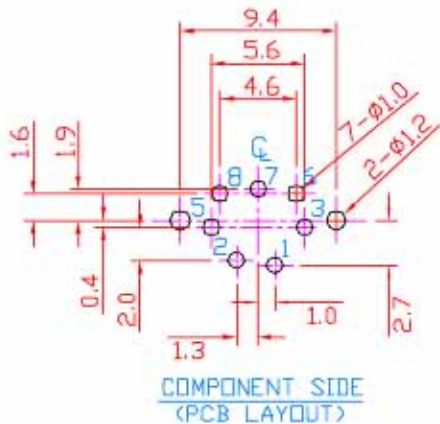
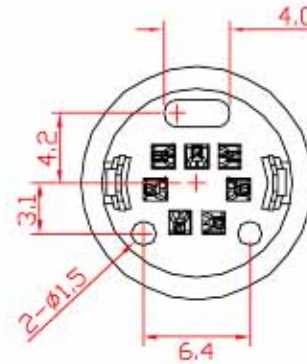
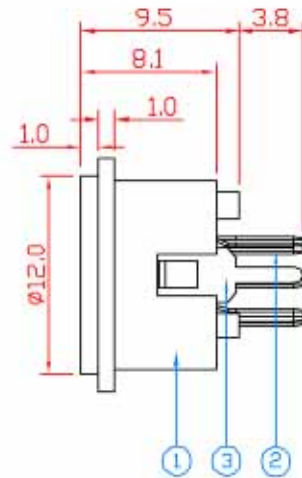


REV	ZONE	REVISION	DATE



Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 100M Ohm Min; AT 500V DC

Rated Voltage And Current: DC 12V. 2A Max; AC 100V. 1A Max

Dielectric Withstanding Voltage: 250V AC For 1 Minute.

Durability (Life Test): 100 Cycles

Insertion Force: 4.0KG Maximum.

Extraction Force: 0.9KG Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	BLACK	1	
2	CONTACT TERM.	PHOS. BRONZE T-0.2	SILVER PLATED	7	SILVER 20~30u"
3	GROUND TERM.	BRASS T-0.3	TIN PLATED	1	TIN 120~200u"