
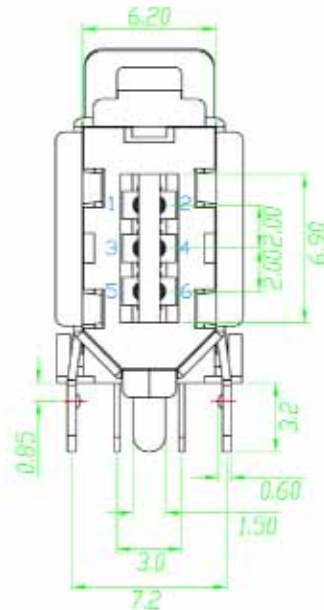
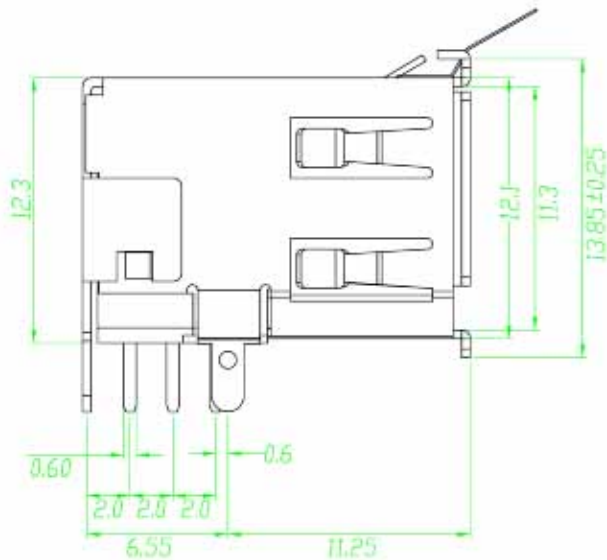
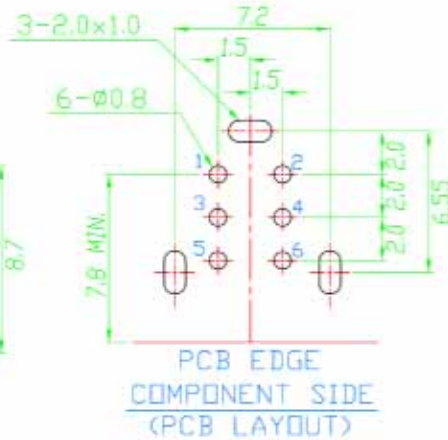


# 毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD.

REV	ZONE	REVISION	DATE

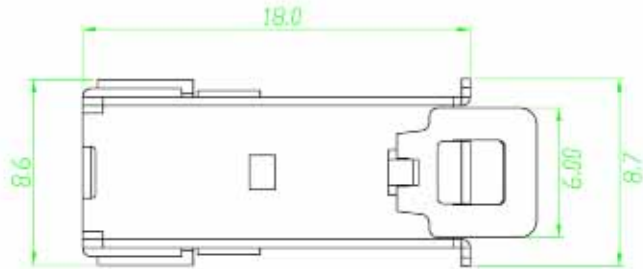

### Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 100M Ohm Min.

Current - Max;1.5A Maximum.

Voltage - Max;40V Maximum.

Dielectric Withstanding Voltage: 500V AC for 1 Minute

Durability (Life Test): 1500 Cycles

Unmating Force: 9.8 Newton TO 39.2 Newton Maximum.

NO.	NAME	MATERIAL	FINISH	REMARK	Q'TY
1	HOUSING	PBT G.F.	BLACK		1
2	PIN TERMINAL	BRASS; t0.25	GOLD/TIN PLATED	Gold:30u" Ni:40~60 u" TIN:120u" (100% pure Tin of lead free plating)	6
3	SHELL	BRASS; t0.4	NICKEL PLATED	Ni:80~120u"	1
4	BOTTOM COVER	PBT G.F.	BLACK		1
5	SPRING SHIELD	STAINLESS; t0.1	BLACK		1