

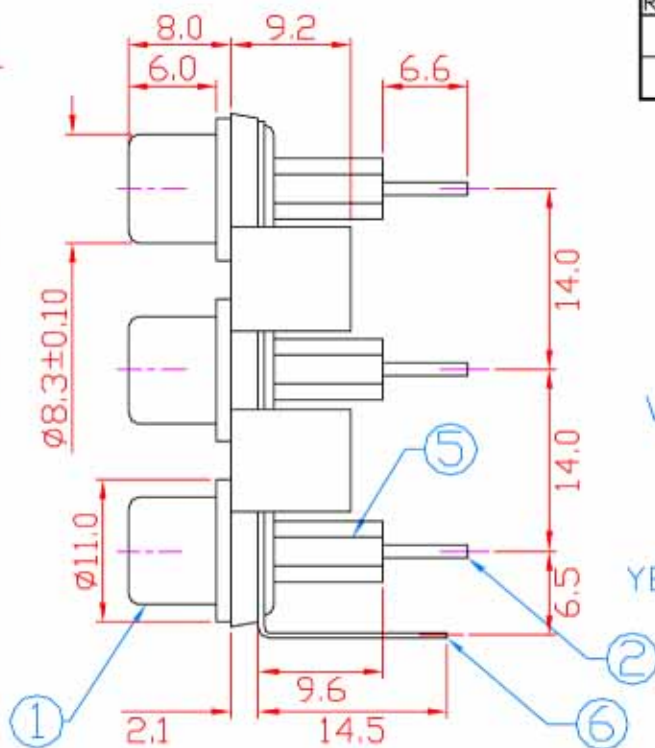


毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD.

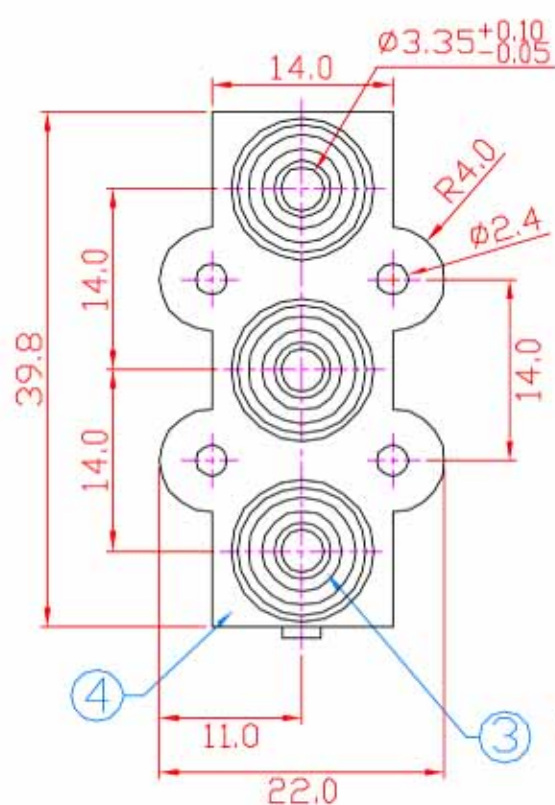

REV	ZONE	REVISION	DATE

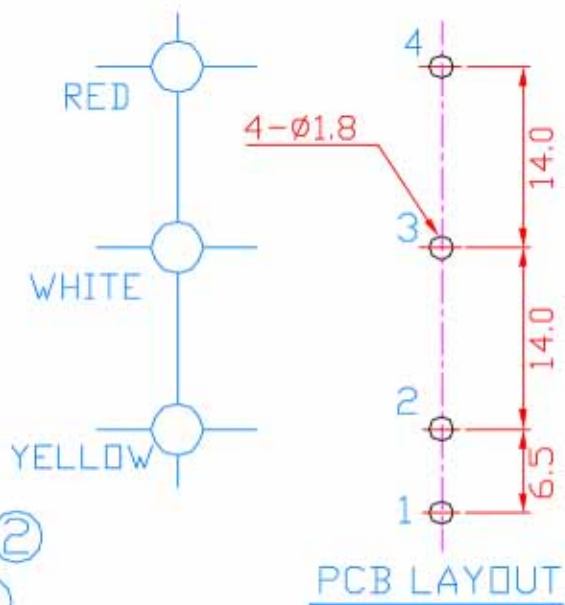

NO.	NAME	MATERIAL	FINISH	Q'TY
1	BARREL	BRASS ± 0.40	NICKEL PLATED	3
2	CONTACT PIN	BRASS ± 1.0	NICKEL PLATED	3
3	INSERT RING	PBT G.F.	YELLOW/WHITE/RED	3
4	HOUSING	ABS	BLACK	1
5	COLLOID	PBT G.F.	BLACK	3
6	GROUND TERM.	C.R.S. ± 0.40	TIN PLATED	1

Specification:

- Contact Resistance: 30m Ohm. Max. At AC 100mA Max. 1KHz
- Insulation Resistance: 100M Ohm Min. At 500V DC.
- Rated Voltage And Current: DC 12V, 2A Max ; AC 100V, 1A Max.
- Dielectric Withstanding Voltage: 500VAC At 60Hz For 1 Minute
- Durability (Life Test): 4000 Cycles
- Insertion Force: 0.3~3.0 Kg.
- Extraction Force: 0.3~3.0 Kg.