

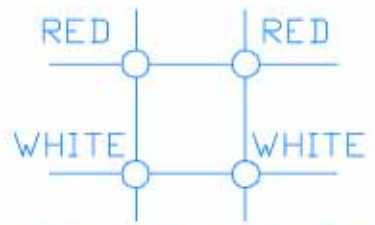
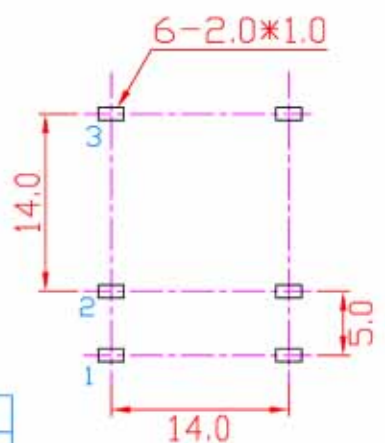
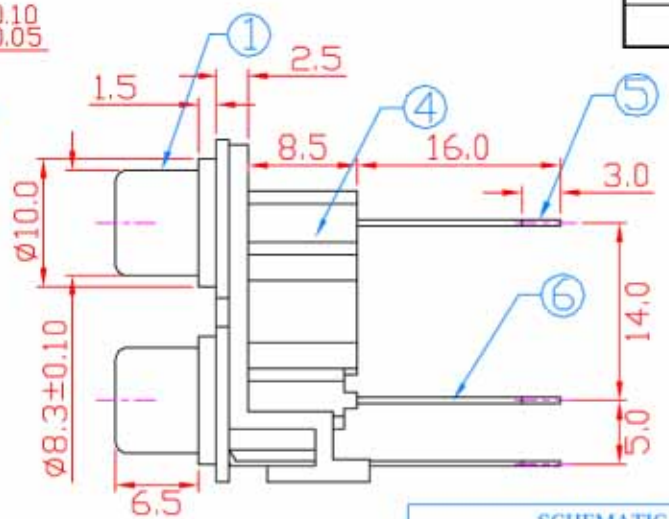


# 毅永企業有限公司 E-YUNG ENTERPRISE CO., LTD.

REV	ZONE	REVISION	DATE

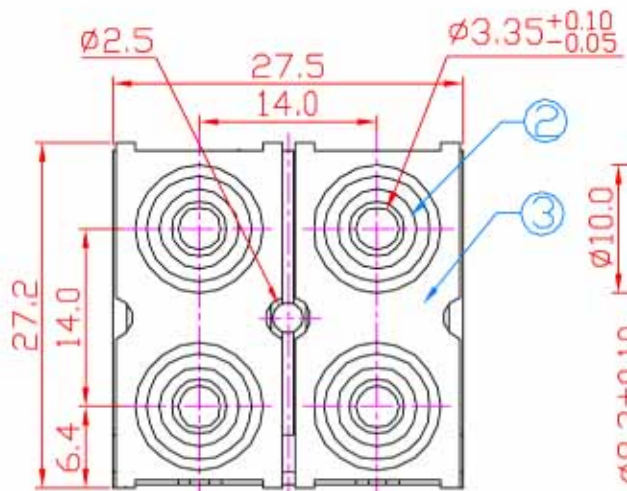

INSERT RING COLORS

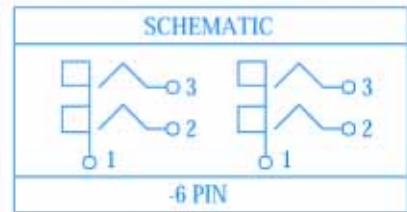

PCB LAYOUT  
(BOTTOM VIEW)

NO.	NAME	MATERIAL	FINISH	Q'TY
1	BARREL	BRASS 0.40	NICKEL PLATED	2
2	INSERT RING	PBT G.F.	RED.WHITE	4
3	COVER	ABS	BLACK	2
4	HOUSING	ABS	WHITE	1
5	TERMINAL	BRASS 0.50	TIN PLATED	2
6	TERMINAL	BRASS 0.50	TIN PLATED	2

**Specification:**

- Contact Resistance: 30m Ohm. Max. At AC 100mA Max. 1KHz
- Insulation Resistance: 100M Ohm Min. At 500V DC.
- Rated Voltage And Current: DC 12V, 2A Max ; AC 100V, 1A Max.
- Dielectric Withstanding Voltage: 500VAC At 60Hz For 1 Minute
- Durability (Life Test): 4000 Cycles
- Insertion Force: 0.3~3.0 Kg.
- Extraction Force: 0.3~3.0Kg.