

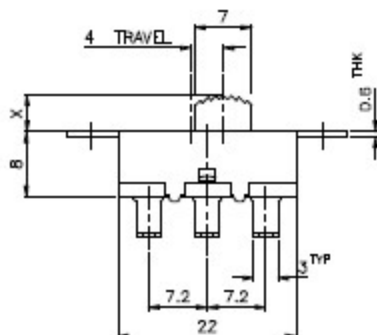


NON-SHORTING  
SCHEMATIC

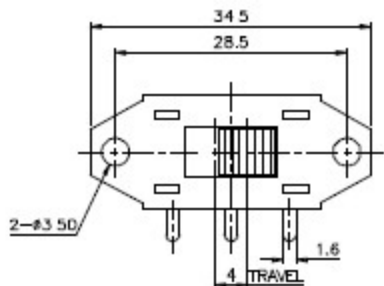

WITH U11 UL & C-UL (CSA) LOGO

ISSUED	SPECIFICATION	TITLE: SLIDE SWITCH 1P2T
	RATING: AC 125V 11A AC 250V 5.5A	MODEL NO: U11SS-12P02-G
	CONTACT RESISTANCE: MAX. 30mΩ INITIAL	UNIT: m m DWN X.J.Mo 22/12/98
	INSULATION RESISTANCE: 500MΩ AT 500V DC	SCALE 2 : 1 CHKD
	WITHSTAND VOLTAGE: AC 1000V FOR 1 MIN	TOLERANCE ±0.20 APPD.
	OPERATION FORCE: 400 ± 200 gm	
	SWITCHING LIFE: 10,000 Cycles(6-10c/m loading)	
BY:	銳永企業有限公司 E-YUNG ENTERPRISE CO., LTD.	DRWG NO:
DATE:		980836-01

The material contained in this drawing is the property of PIC. Any use other than that specifically authorized by PIC is prohibited. The above drawing is subjected to change for improvement without prior notice.