



NON-SHORTING
SCHEMATIC

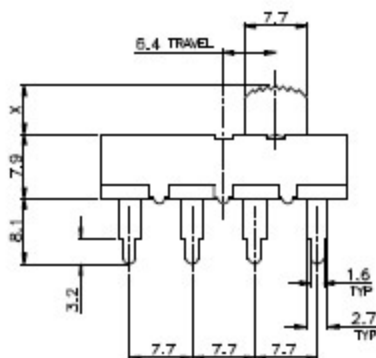

X -

MARKING:

SIDE A: 33

SIDE B: U11 AC 125V 11A
AC 250V 5.5A

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 2P3T			
	RATING: AC 125V 11A AC 250V 5.5A	MODEL NO: U11SS-23L06-G			
	CONTACT RESISTANCE: MAX. 30mΩ	UNIT: m m DWN			
	INSULATION RESISTANCE: 500MΩ AT 500V DC				
	WITHSTAND VOLTAGE: AC 1000V FOR 1 MIN	SCALE: 2 : 1	CHK'D		
	OPERATION FORCE: 400 ± 150 g				
	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)	TOLERANCE: ±0.20	APP'D		
BY:	E-YUNG ENTERPRISE CO., LTD.				DRWG NO:
DATE:					960420-02

The material contained in this drawing is the property of PIC. Any use other than that specifically authorized by PIC is prohibited. The above drawing is subjected to change for improvement without prior notice.

ENG-51