REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	16/03/09'	
B				
C				

CUSTOMER DRAWING

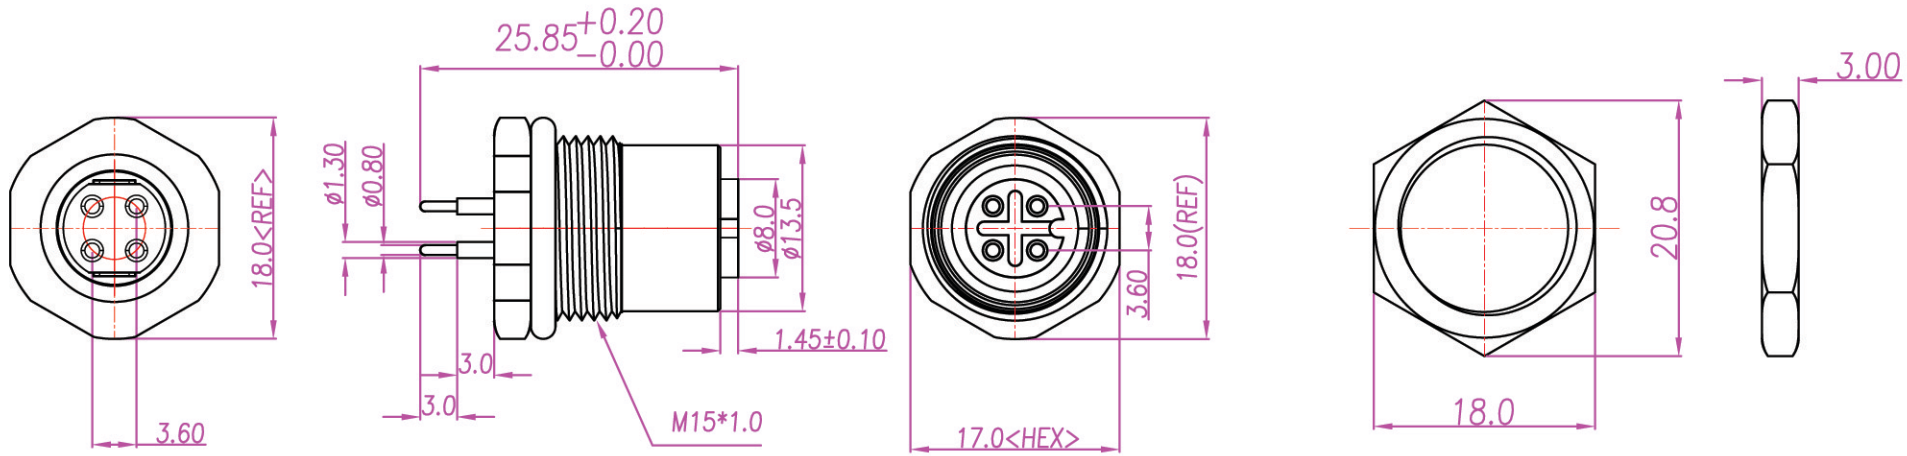



PANEL CUT-OUT



RECOMMENDED P.C.B LAYOUT

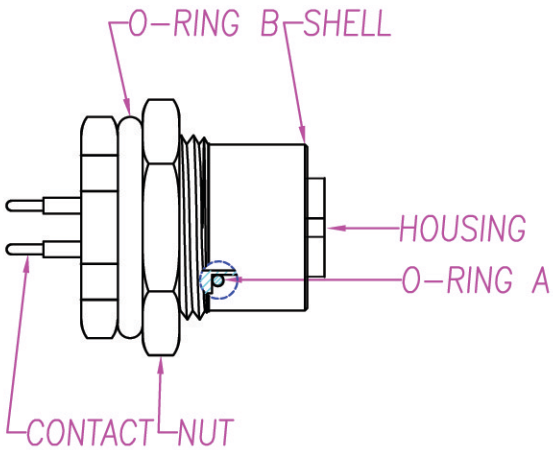

ASSEMBLY

1. MATERIAL :
   1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
   1-2. CONTACT : BRASS
   1-3. SHELL : BRASS
   1-4. O-RING A :EPDM; COLOR : BLACK
   1-5. O-RING B :NBR; COLOR : BLACK
   1-6. NUT : BRASS
2. FINISH :
   2-1. CONTACT : 10 MICRO INCHES MIN. GOLD PLATED
   UNDER PLATE : NICKEL
   2-2. SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL
   2-3. NUT : NICKEL PLATED 60u" ~ 100u" OVER ALL
3. ELECTRICAL SPECIFICATION :
   3-1. Rated current : 5A
   3-2. Voltage :125V
   3-3. Water proof: IPX7
4. Environmental :
   4-1. Operation Temperature : -40 ℃~85℃

DRAWN	Emily Suen	APP'D		UNIT	mm	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°		TITLE	防水頭 4PIN(F) 鋼板側角成品(插板)		SHEET
CHK'D				SCALE	1:1			PART NO.	WP-04F2-22	DWG NO. QC3452	VERSION A